



Tripod Mounting Instructions (TR-3)

Tool Required: Phillips screwdriver

- 1. Separating the mounting bracket and the tripod bracket:** The mounting bracket and the tripod bracket are attached to each other to prevent damage in shipping. Loosen the thumbscrew that holds them together and take them apart.
- 2. Fastening the mounting bracket:** Attach the mounting bracket (the flatter of the two pieces) to the bottom of your equipment with the screws provided (you'll need 3 or 4, depending on the equipment you are mounting on the tripod).
- 3. Fastening the tripod bracket:** Slide the tripod bracket (*Figure 3 below*) into the mounting bracket. The tripod bracket is slightly narrower at one end, and will only slide into the mounting bracket from one direction. Tighten the thumbscrew that holds the two together until just snug. Do not over-tighten.

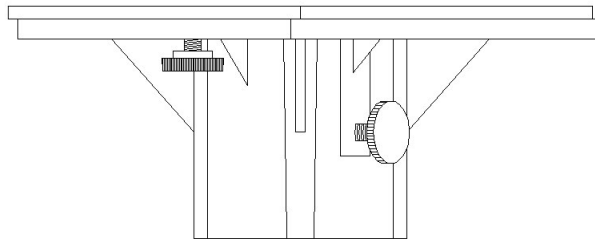


Figure 3 - Tripod bracket

- 4. Mounting the equipment on the tripod:** Spread the tripod's legs and ensure that the tripod is stable. Lift the equipment onto the top of the tripod. Tighten the thumbscrew on the side until just snug. Do not over-tighten.

Colorado Time Systems
1551 E. 11th Street, Loveland, CO 80537
Phone: 970-667-1000 ext. 256 Toll Free: 800-287-0653 ext. 256
Fax: 970-667-1032 E-mail: customerservice@coloradotime.com
www.coloradotime.com Shop online: <http://secure.coloradotime.com>